

Brussels, 13 February 2017 (OR. en)

6214/17 ADD 1

ENV 124 ENT 35 MI 122

#### **COVER NOTE**

From:	European Commission
date of receipt:	3 February 2017
To:	General Secretariat of the Council
No. Cion doc.:	D048925/03 - Annexes 1 to 3
Subject:	ANNEXES to the Commission Regulation (EU)/ correcting Directive 2007/46/EC of the European Parliament and of the Council, Commission Regulation (EU) No 582/2011 and Commission Regulation (EU) YYYY/XXX [WLTP]

Delegations will find attached document D048925/03 - Annexes 1 to 3.

Encl.: D048925/03 - Annexes 1 to 3

6214/17 ADD 1 AM/am

DG E 1A EN



Brussels, XXX D048925/03 [...](2016) XXX draft

ANNEXES 1 to 3

#### **ANNEXES**

to the

Commission Regulation (EU) .../...

correcting Directive 2007/46/EC of the European Parliament and of the Council, Commission Regulation (EU) No 582/2011 and Commission Regulation (EU) YYYY/XXX [WLTP]

#### **ANNEXES**

#### to the

#### Commission Regulation (EU) .../...

correcting Directive 2007/46/EC of the European Parliament and of the Council, Commission Regulation (EU) No 582/2011 and Commission Regulation (EU) YYYY/XXX [WLTP]

## ANNEX I

Directive 2007/46/EC is corrected as follows:

- (1) Annex I is corrected as follows:
- (a) point 3.2.12.2.1.3. is replaced by the following:
  - "3.2.12.2.1.3. Type of catalytic action: ... (oxidizing, three-way, lean NOx trap, SCR, lean NOx catalyst or other)";
- (b) The number of point 3.2.12.7.6.3 shall be changed in 3.2.12.2.7.6.3
- (c) the following points are inserted:

"3.5.7.2.1.1.0. Vehicle High (NEDC):	
"3.5.7.2.1.2.0. Vehicle low (if applicable) (NEDC):	g/km"
"3.5.7.2.2.1.0. Vehicle high (NEDC):	_
"3.5.7.2.2.2.0. Vehicle low (if applicable) (NEDC):	g/km"
"3.5.7.2.2.3.0. Vehicle M (if applicable) (NEDC):	g/km"

"3.5.7.2.3.1.0.	Vehicle high	şh (NEDC):		g/km"	
"3.5.7.2.3.2.0.	Vehicle lov	v (if applicable	e) (NEDC):		g/km"
"3.5.7.2.3.3.0.	Vehicle M	(if applicable)	(NEDC):		. g/km".

#### (2) Annex VIII is corrected as follows:

- (a) in the table "Ambient Temperature Correction Test (ATCT)" in point 2.1.1 the column "Road load matrix family" is deleted;
- (b) the third table in point 3.1 with the columns "Road Load Matrix family identifier" and "Variant/versions" is deleted;
- (c) the column ""Road Load Matrix family identifier" in the fourth table "Results" in point 3.1 is deleted;
- (d) at the bottom of the table "Results" in point 3.1 the following row is added:

"

Frontal area (m <sup>2</sup> ) (for road load matrix family		
vehicles only)		

":

- (e) the footnote 23 in point 3.1 is deleted;
- (f) the last line in point 3.1 under the table "Results" is replaced by the following: "Repeat for each interpolation family.";
- (g) the third table in point 3.2, with the columns "Road Load Matrix family identifier" and "Variant/versions" is deleted;
- (h) the column ""Road Load Matrix family identifier" in the fourth table "Results" in point 3.2 is deleted;
- (i) the last row of the table "Results" in point 3.2 is replaced by the following:

\*\*

Frontal area (m <sup>2</sup> ) (for road load matrix family	
vehicles only)	

":

- (j) the third table in point 3.3, with the columns "Road Load Matrix family identifier" and "Variant/versions" is deleted;
- (k) the column "Matrix family identifier" in the fourth table "Results" in point 3.3 is deleted;

(l) the last row of the table "Results" in point 3.3 is replaced by the following:

"

"Frontal area (m²) (for road load matrix family		
vehicles only)		11.

".

(m) point 3.5 is replaced by the following:

"3.5. Output report(s) from the correlation tool in accordance with Implementing Regulation (EU) YYYY/XXX

Repeat for each interpolation family:

Interpolation family identifier [Footnote: "Type Approval Number + Interpolation Family Sequence number"]: ...

VH report: ...

VL report (if applicable): ...

3.5.1. Deviation factor (if applicable)

Repeat for each interpolation family:

Interpolation family identifier [Footnote: "Type Approval Number + Interpolation Family Sequence number"]: ...

3.5.2. Verification factor (if applicable)

Repeat for each interpolation family:

Interpolation family identifier [Footnote: "Type Approval Number + Interpolation Family Sequence number"]: ...".

- (3) Annex IX is corrected as follows:
- (n) In Part II Incomplete Vehicles side 2, vehicle category M1 and
- (o) in Part II Incomplete Vehicles side 2, vehicle category N1 and
- (p) in Part II Incomplete Vehicles side 2, vehicle category M2 and
- (q) in Part II Incomplete Vehicles side 2, vehicle category N2

point 49 is replaced by the following:

"49. CO<sub>2</sub> emissions/fuel consumption/electric energy consumption (<sup>m</sup>) (<sup>r</sup>):

## 1. All power trains, except pure electric vehicles (if applicable)

NEDC values	CO <sub>2</sub> emissions	Fuel consumption
Urban conditions <sup>(1)</sup> :	g/km	1/100 km or m <sup>3</sup> /100 km or kg/100km ( <sup>1</sup> )
Extra-urban conditions <sup>(1)</sup> :	g/km	1/100 km or m <sup>3</sup> /100 km or kg/100km ( <sup>1</sup> )
Combined <sup>(1)</sup> :	g/km	1/100 km or m <sup>3</sup> /100 km or kg/100km ( <sup>1</sup> )
Weighted <sup>(1)</sup> , combined	g/km	1/100 km or m <sup>3</sup> /100 km or kg/100km
Deviation factor (if applicable)		
Verification factor (if applicable)	'1' or '0'	

# 2. Pure electric vehicles and OVC hybrid electric vehicles (if applicable)

Electric energy consumption (weighted, combined (1))	Wh/km
Electric range	km

- 3. Vehicle fitted with eco-innovation(s): yes/no (¹)
  - 3.1. General code of the eco-innovation(s)  $(p^1)$ : ...
  - 3.2. Total  $CO_2$  emissions savings due to the eco-innovation(s) ( $^{p2}$ ) (repeat for each reference fuel tested):
- 3.2.1. NEDC savings: ...g/km (if applicable)
- 3.2.2. WLTP savings: ...g/km (if applicable)

# 4. All power trains, except pure electric vehicle, under Regulation (EU) YYYY/ZZZ (if applicable)

WLTP values	CO <sub>2</sub> emissions	Fuel consumption
Low <sup>(1)</sup> :	g/km	1/100 km or m <sup>3</sup> /100 km or kg/100km( <sup>1</sup> )
Medium <sup>(1)</sup> :	g/km	1/100 km or m <sup>3</sup> /100 km or kg/100km( <sup>1</sup> )

High <sup>(1)</sup> :	g/km	1/100 km or m <sup>3</sup> /100 km or kg/100km( <sup>1</sup> )
Extra High <sup>(1)</sup> :	g/km	1/100 km or m <sup>3</sup> /100 km or kg/100km( <sup>1</sup> )
Combined:	g/km	1/100 km or m <sup>3</sup> /100 km or kg/100km( <sup>1</sup> )
Weighted, combined <sup>(1)</sup>	g/km	1/100 km or m <sup>3</sup> /100 km or kg/100km( <sup>1</sup> )

# 5. Pure electric vehicles and OVC hybrid electric vehicles, under Regulation (EU) YYYY/ZZZ (if applicable)

#### 5.1. Pure electric vehicles

Electric energy consumption		Wh/km
Electric range		km
Electric range city		km

## 5.2 OVC hybrid electric vehicles

Electric energy consumption (EC <sub>AC,weighted</sub> )	Wh/km
Electric range (EAER)	km
Electric range city (EAER city)	km";

..

- (r) In part I Complete and Completed Vehicles side 2, vehicle category M3 and
- (s) in part I Complete and Completed Vehicles side 2, vehicle category N3 and
- (t) in part II Incomplete Vehicles side 2, vehicle category M3 and
- (u) in part II Incomplete Vehicles side 2, vehicle category N3 point 47.1 is deleted.
- (v) In part I Complete and Completed Vehicles side 2, vehicle category M2 and
- (w) in part I Complete and Completed Vehicles side 2, vehicle category N2 and
- (x) in part II Incomplete Vehicles side 2, vehicle category M2 and
- (y) in part II Incomplete Vehicles side 2, vehicle category N2

a reference to explanatory note (r) is added to point 47.1.

# ANNEX II

Regulation (EU) No 582/2011 is corrected as follows:

(1) In Annex I, Appendix 9 is replaced by the following:

"Appendix 9

EC Type-Approval Certification Numbering System

Section 3 of the EC type-approval number issued according to Articles 6(1), 8(1) and 10(1) shall be composed by the number of the implementing regulatory act or the latest amending regulatory act applicable to the EC type-approval. The number shall be followed by an alphabetical character reflecting the requirements of OBD and SCR systems in accordance with Table 1.

Table 1

Character	Character NO <sub>x</sub> OTL (¹)	PM OTL (²) CO OTL ( <sup>6</sup> )		IUPR ( <sup>13</sup> )	Reagent OBD quality monitors (12)	ional	old sments(	Power threshold Implementation requirements(¹dates: new types vehicles  4)	Implementation dates: all vehicles	Last date of registration
A ( <sup>9, 10</sup> )	A ( <sup>9, 10</sup> ) Row "phase-in period" Performance B ( <sup>10</sup> ) of Table 1 or Table 2 Monitoring ( <sup>3</sup> )	Performance Monitoring (³)	N/A	Phase-in (7)	Phase-in Phase-in ( <sup>4</sup> )	N/A	20%	31.12.2012	31.12.2013	31.8.2015 ( <sup>9</sup> ) 30.12.2016 ( <sup>10</sup> )
B ( <sup>11</sup> )	Row "phase-in period" of Tables 1 and 2	N/A	Row "phase-in period" of Table 2	N/A	Phase-in ( <sup>4</sup> )	N/A	20%	1.9.2014	1.9.2015	30.12.2016

31.08.2019	
31.12.2016	1.9.2019
31.12.2015	1.9.2018
20%	10%
Yes	Yes
General General	General General (*)
General ( <sup>8</sup> )	General ( <sup>8</sup> )
Row "general requirements" of Table 2	Row "general requirements" of Table 2
Row "general Row "general requirements" of Table 1 Table 2	Row "general Row "general requirements" cof Table 1 Table 2
Row "general Row "general requirements" of Table 1 or Table 2	Row "general Row "general requirements" of Table 1 or Table 2
C	D

"NOx OTL" monitoring requirements as set out in Table 1 of Annex X for compression ignition and dual-fuel engines and vehicles and Table 2 of Annex X for positive ignition engines and vehicles.

"PM OTL" monitoring requirements as set out in Table 1 of Annex X for compression ignition and dual-fuel engines and vehicles.

"Performance monitoring" requirements as set out in point 2.1.1 of Annex X.

Reagent quality "phase-in" requirements as set out in point 7.1 of Annex XIII.

Reagent quality "general" requirements as set out in point 7.1.1 of Annex XIII.

"CO OTL" monitoring requirements as set out in Table 2 of Annex X for positive ignition engines and vehicles.

IUPR "Phase-in" requirements as set out in Section 6 of Annex X.

IUPR "General" requirements as set out in Section 6 of Annex X.

For positive-ignition engines and vehicles equipped with such engines.

For compression-ignition and dual-fuel engines and vehicles equipped with such engines.

Only applicable to positive-ignition engines and vehicles equipped with such engines.

Additional provisions concerning monitoring requirements as set out in paragraph 2.3.1.2. of Annex 9A to UNECE Regulation No 49.

UPR specifications are set out in Annex X. Positive Ignition engines and vehicles equipped with such engines are not subjected to IUPR.

SC requirement set out in Appendix 1 to Annex II. 

Not applicable.".

(2) In Annex II, in Appendix 1, point 1 is replaced by the following:

#### "1. INTRODUCTION

This Appendix describes the procedure to determine gaseous emissions from onvehicle onroad measurements using Portable Emissions Measurement Systems (hereinafter 'PEMS'). The pollutant emissions to be measured from the exhaust of the engine include the following components: carbon monoxide, total hydrocarbons and nitrogen oxides for compression ignition engines and carbon monoxide, non-methane hydrocarbons, methane and nitrogen oxides for positive ignition engines. Additionally, carbon dioxide shall be measured to enable the calculation procedures described in Section 4.

For engines fuelled with natural gas, the manufacturer, technical service or approval authority may choose to measure the total hydrocarbon (THC) emissions only instead of measuring the methane and non-methane hydrocarbon emissions. In that case, the emission limit for the total hydrocarbon emissions is the same as the one specified in Annex I to Regulation (EC) No 595/2009 for methane emissions. For the purposes of the calculation of the conformity factors pursuant to points 4.2.3. and 4.3.2. of this Appendix, the applicable limit shall be the methane emission limit only.

For engines fuelled with gases other than natural gas, the manufacturer, technical service or approval authority may choose to measure the total hydrocarbon (THC) emissions instead of measuring the non-methane hydrocarbon emissions. In that case, the emission limit for the total hydrocarbon emissions is the same as the one specified in Annex I to Regulation (EC) No 595/2009 for non-methane hydrocarbon emissions. For the purposes of the calculation of the Conformity Factors pursuant to points 4.2.3. and 4.3.2. of this Appendix, the applicable limit shall be the non-methane emission limit."

(3) In Annex X, point 2.4.1.3. is replaced by the following:

"2.4.1.3. The OBD standard Euro 6 - 2 in Table 1 of Appendix 6 of Annex I to Regulation (EC) No 692/2008 shall be considered equivalent to the characters C and D of Table 1 of Appendix 9 of Annex I to this Regulation."

#### **Annex III**

Regulation (EU) YYYY/ZZZ is corrected as follows:

- (1) Annex I is corrected as follows:
- (a) In point 2.4 Figure I.2.4 is replaced by the following:

_	

						Figure I.2.4	1.2.4				
			App	lication	of test requ	uirements fo	ır type-appro	Application of test requirements for type-approval and extensions			
Vehicle category			Vehicles '	with pos	itive ignitio	on engines i	Vehicles with positive ignition engines including hybrids <sup>1</sup>	rids <sup>1</sup>	Vehicles with compression ignition engines including hybrids	Pure electric vehicles	Hydroge n fuel cell
		Mono fuel	fuel			Bi-fuel <sup>3</sup>		Flex-fuel <sup>3</sup>			
Reference fuel	Petrol	LPG	NG/Bi ometh	Hydr	Petrol (E10)	Petrol (E10)	Petrol (E10)	Petrol (E10)	Diesel	ı	Hydroge n (Fuel
	(1)		alle	(ICE	LPG	NG/Bio methane	Hydrogen (ICE)	Ethanol (E85)	(B/)		(en)
Gaseous pollutants	Yes	Yes	Yes	Yes <sup>4</sup>	Yes	Yes	Yes	Yes	Yes	1	1
(Type 1 test)					(both fuels)	(both fuels)	(both fuels)	(both fuels)			
PM	Yes <sup>2</sup>			1	Yes <sup>2</sup>	Yes <sup>2</sup>	Yes <sup>2</sup>	Yes <sup>2</sup>	Yes		
(Type 1 test)					(petrol only)	(petrol only)	(petrol only)	(both fuels)			
PN	Yes <sup>2</sup>				Yes <sup>2</sup>	Yes <sup>2</sup>	Yes <sup>2</sup>	Yes <sup>2</sup>	Yes		
					(petrol only)	(petrol only)	(petrol only)	(both fuels)			

=

Gaseous pollutants, RDE (Type 1A test)	Yes	Yes	Yes	Yes (4)	Yes (both fuels)	Yes (both fuels)	Yes (both fuels)	Yes (both fuels)	Yes -
PN, RDE (Type 1A test)	Yes <sup>2</sup>	ı	1	ı	Yes (both fuels) <sup>2</sup>	Yes (both fuels) <sup>2</sup>	Yes (both fuels) <sup>2</sup>	Yes (both fuels) <sup>2</sup>	Yes -
Idle emissions	Yes	Yes	Yes	1	Yes	Yes	Yes	Yes	
(Type 2 test)					(both fuels)	(both fuels)	(petrol only)	(both fuels)	
Crankcase emissions	Yes	Yes	Yes		Yes	Yes	Yes	Yes	
(Type 3 test)					(petrol only)	(petrol only)	(petrol only)	(petrol only)	
Evaporative emissions	Yes				Yes	Yes	Yes	Yes	
(Type 4 test)					(petrol only)	(petrol only)	(petrol only)	(petrol only)	
Durability	Yes	Yes	Yes	Yes	Yes	Yes	Yes	Yes	Yes — — —
(Type 5 test)					(petrol only)	(petrol only)	(petrol only)	(petrol only)	
Low temperature emissions	Yes				Yes	Yes	Yes	Yes	1
(Type 6 test)					(petrol only)	(petrol only)	(petrol only)	(both fuels)	
In-service conformity	Yes	Yes	Yes	Yes	Yes	Yes	Yes	Yes	Yes — — —

					(both fuels)	(both fuels)	(both fuels)	(both fuels)			
On-board diagnostics Yes	Yes	Yes	Yes Yes	Yes	Yes	Yes	Yes	Yes	Yes		I
	Yes	Yes Yes	Yes	Yes	Yes	Yes	Yes	Yes	Yes	Yes	Yes
consumption, electric and electric range					(both fuels)	(both fuels)	(both fuels)	(both fuels)			
Smoke opacity				1		1	-	I	Yes		
Engine power	Yes	Yes	Yes Yes	Yes	Yes	Yes	Yes	Yes	Yes	Yes	Yes

<sup>1</sup> Specific test procedures for hydrogen and flex fuel biodiesel vehicles will be defined at a later stage.

<sup>&</sup>lt;sup>2</sup> Particulate mass and particle number limits and respective measurement procedures shall apply only to vehicles with direct injection engines

<sup>&</sup>lt;sup>3</sup> When a bi-fuel vehicle is combined with a flex fuel vehicle, both test requirements are applicable.

<sup>&</sup>lt;sup>4</sup> Only NO<sub>x</sub> emissions shall be determined when the vehicle is running on hydrogen.

<sup>&</sup>lt;sup>5</sup> Further requirements for biodiesel will be defined later.

- (b) Appendix 3 is corrected as follows:
  - (i) The following points are inserted:

	g/km"	"3.5.7.2.1.1.0. Vehicle high (NEDC):
g/km"		"3.5.7.2.1.2.0. Vehicle low (if applicable) (NEDC): .
	g/km"	"3.5.7.2.2.1.0. Vehicle high (NEDC):
g/km"		"3.5.7.2.2.2.0. Vehicle low (if applicable) (NEDC): .
g/km"		"3.5.7.2.2.3.0. Vehicle M (if applicable) (NEDC):
	g/km"	"3.5.7.2.3.1.0. Vehicle high (NEDC):
g/km"		"3.5.7.2.3.2.0. Vehicle low (if applicable) (NEDC): .
g/km";		"3.5.7.2.3.3.0. Vehicle M (if applicable) (NEDC):

- (ii) In point 3.5.8.3. the explanatory notes corresponding to the letters (w) to (w5) are deleted
- (iii) After the table in the model information document the following text is inserted:

**Explanatory notes:** 

- (1) Delete where not applicable (there are cases where nothing needs to be deleted when more than one entry is applicable).
- (<sup>2</sup>) Specify the tolerance.
- (<sup>3</sup>) Please fill in here the upper and lower values for each variant.
- (<sup>6</sup>) Vehicles can be fuelled with both petrol and a gaseous fuel but, where the petrol system is fitted for emergency purposes or starting only and of which the petrol tank cannot contain more than 15 litres of petrol, will be regarded for the test as vehicles which can only run a gaseous fuel.
- (<sup>7</sup>) Optional equipment that affects the dimensions of the vehicle shall be specified.
- (c) Classified according to the definitions set out in Part A of Annex II.
- (f) Where there is one version with a normal cab and another with a sleeper cab, both sets of masses and dimensions are to be stated.
- (<sup>g</sup>) Standard ISO 612: 1978 Road vehicles Dimensions of motor vehicles and towed vehicles terms and definitions.
- (h) The mass of the driver is assessed at 75 kg.

  The liquid containing systems (except those for used water that must remain empty) are

filled to 100 % of the capacity specified by the manufacturer. The information referred to in points 2.6(b) and 2.6.1(b) do not need to be provided for vehicle categories N 2, N 3, M 2, M 3, O 3, and O 4.

- (¹) For trailers or semi-trailers, and for vehicles coupled with a trailer or a semi-trailer, which exert a significant vertical load on the coupling device or the fifth wheel, this load, divided by standard acceleration of gravity, is included in the maximum technically permissible mass.
- ( <sup>k</sup> ) In the case of a vehicle that can run either on petrol, diesel, etc., or also in combination with another fuel, items shall be repeated.
   In the case of non-conventional engines and systems, particulars equivalent to those referred to here shall be supplied by the manufacturer.
- (1) This figure shall be rounded off to the nearest tenth of a millimetre.
- ( $^{\rm m}$ ) This value shall be calculated ( $\pi = 3,1416$ ) and rounded off to the nearest cm<sup>3</sup>.
- (<sup>n</sup>) Determined in accordance with the requirements of Regulation (EC) No 715/2007 or Regulation (EC) No 595/2009 as applicable.
- (°) Determined in accordance with the requirements of Council Directive 80/1268/EEC (OJ L 375, 31.12.1980, p. 36).
- (<sup>p</sup>) The specified particulars are to be given for any proposed variants.
- (<sup>q</sup>) With respect to trailers, maximum speed permitted by the manufacturer.
- (w) Eco-innovations.
- (w1) Expand the table if necessary, using one extra row per eco-innovation.
- (w2) Number of the Commission Decision approving the eco-innovation.
- (w3) Assigned in the Commission Decision approving the eco-innovation.
- (w4) Under agreement of the type-approval authority, if a modelling methodology is applied instead of the type 1 test cycle, this value shall be the one provided by the modelling methodology.
- $(^{\text{w5}})$  Sum of the  $\text{CO}_2$  emissions savings of each individual eco-innovation.
  - (iv) in the Appendix to information document, the table is replaced by the following:

"

VL (if existing)	VH	V representative (only for road load matrix family)
2.2. Vehicle bodywork type	2.2. Vehicle bodywork type	2.2. Vehicle bodywork type

(variant/version)	(variant/version)	(variant/version)
2.3. Road load method used (measurement or calculation by road load family)	2.3. Road load method used (measurement or calculation by road load family)	2.3. Road load method used (measurement or calculation by road load matrix family)
2.4. Road load information from the test	2.4. Road load information from the test	2.4. Road load information from the test
2.4.1. Tyres make and type:	2.4.1. Tyres make and type:	2.4.1. Tyres make and type:
2.4.2. Tyre dimensions (front/rear):	2.4.2. Tyre dimensions (front/rear):	2.4.2. Tyre dimensions (front/rear):
2.4.4. Tyre pressure (front/rear) (kPa):	2.4.4. Tyre pressure (front/rear) (kPa):	2.4.4. Tyre pressure (front/rear) (kPa):
2.4.5. Tyre rolling resistance (front/rear) (kg/t):	2.4.5. Tyre rolling resistance (front/rear) (kg/t):	2.4.5. Tyre rolling resistance (front/rear) (kg/t) and RR class (A-G):
2.4.6. Vehicle test mass (kg):	2.4.6. Vehicle test mass (kg):	
2.4.7. Delta Cd.A compared to		2.4.6. Vehicle test mass (kg):
VH (m²)	2.4.8. Road load coefficient f0,	2.4.8. Road load coefficient f0, f1, f2
2.4.8. Road load coefficient f0, f1, f2	f1, f2	2.4.9. Frontal area m <sup>2</sup> (0,0000 m <sup>2</sup> )
		2.4.10. Calculation tool information to calculate VH and VL road loads

۱۱,

- (c) in Appendix 4, the "Addendum to EC type-approval certificate No ..." is corrected as follows:
  - (i) in point 2.1., the following table is inserted after the table entitled "ATCT test":

"

ATCT test Result	СО	THC	NMHC	NO <sub>x</sub>	THC + NO <sub>x</sub>	PM	PN
Result	(mg/km)	(mg/km)	(mg/km)	(mg/km)	(mg/km)	(mg/km)	(#.10 <sup>11</sup> /km)
Measured <sup>1,2</sup>							

Where applicable.

- Round to two decimal numbers.";
- (ii) in point 2.1., the words "Type 4: ... g/test" are replaced by the words "Type 4: ... g/test; test procedure in accordance with Annex VI to Regulation (EC) No 692/2008: Yes/No";
- (iii) in the Appendix to the Addendum to the Type Approval Certificate, point 3 is replaced by the following:

3. Deviation and verification factors (determined in accordance with point 3.2.8 of Regulation (EU) YYYY/XXX"):

Deviation factor (if applicable)	
Verification factor (if applicable)	'1' or '0'
Hash identifier code of the correlation tool output report	

١٠.

"

(d) in Appendix 6, Table 1 is replaced by the following:

••

Table 1

Character	Emission standard	OBD standard	Vehicle category and class	Engine	Implementation date: new types	Implementation date: new vehicles	Last date of registration
AA	Euro 6c	Euro 6-	M, N1 class I	PI, CI			31.8.2018
BA	Euro 6b	Euro 6-	M, N1 class I	PI, CI			31.8.2018
AB	Euro 6c	Euro 6-	N1 class II	PI, CI			31.8.2019

							31.8.2019
BB	Euro 6b	Euro 6-	N1 class II	PI, CI			31.0.2017
AC	Euro 6c	Euro 6-	N1 class III, N2	PI, CI			31.8.2019
ВС	Euro 6b	Euro 6-	N1 class III, N2	PI, CI			31.8.2019
AD	Euro 6c	Euro 6-	M, N1 class I	PI, CI		1.9.2018	31.8.2019
AE	Euro 6c- EVAP	Euro 6-	N1 class II	PI, CI		1.9.2019	31.8.2020
AF	Euro 6c- EVAP	Euro 6-	N1 class III, N2	PI, CI		1.9.2019	31.8.2020
AG	Euro 6d- TEMP	Euro 6-	M, N1 class I	PI, CI	1.9.2017(*)		31.8.2019
BG	Euro 6d- TEMP- EVAP	Euro 6- 2	M, N1 class I	PI, CI	1.9.2019	1.9.2019	31.12.2020
АН	Euro 6d- TEMP	Euro 6-	N1 class II	PI, CI	1.9.2018(*)		31.8.2019
ВН	Euro 6d- TEMP- EVAP	Euro 6-	N1 class II	PI, CI	1.9.2019	1.9.2020	31.12.2021
AI	Euro 6d- TEMP	Euro 6-	N1 class III, N2	PI, CI	1.9.2018(*)		31.8.2019
BI	Euro 6d- TEMP- EVAP	Euro 6-	N1 class III, N2	PI, CI	1.9.2019	1.9.2020	31.12.2021
AJ	Euro 6d	Euro 6-	M, N1 class I	PI, CI	1.1.2020	1.1.2021	
AK	Euro 6d	Euro 6-	N1 class II	PI, CI	1.1.2021	1.1.2022	
AL	Euro 6d	Euro 6-	N1 class III, N2	PI, CI	1.1.2021	1.1.2022	
AX	n.a.	n.a.	All vehicles	Battery full			

				electric		
AY	n.a.	n.a.	All vehicles	Fuel cell		
AZ	n.a.	n.a.	All vehicles using certificates according to point 2.1.1 of Annex I	PI, CI		

(\*)This limitation does not apply if a vehicle was type-approved in accordance with the requirements of Regulation (EC) 715/2007 and its implementing legislation prior to 1 September 2017 in the case of category M and N1 class I vehicles, or prior to 1 September 2018 in the case of category N1 class II and III and category N2 vehicles, according to the last sub-paragraph of Article 15(4).

#### Key:

'Euro 6-1' OBD standard = Full Euro 6 OBD requirements but with preliminary OBD threshold limits as defined in point 2.3.4 of Annex XI and partially relaxed IUPR;

'Euro 6-2' OBD standard = Full Euro 6 OBD requirements but with final OBD threshold limits as defined in point 2.3.3 of Annex XI;

'Euro 6b' emissions standard = Euro 6 emission requirements including revised measurement procedure for particulate matter, particle number standards (preliminary values for PI direct injection);

'Euro 6c' emissions standard = RDE NOx testing for monitoring only (no NTE emission limits applied), otherwise full Euro 6 tailpipe emission requirements (including PN RDE);

'Euro 6c-EVAP' emissions standard = RDE NOx testing for monitoring only (no NTE emission limits applied), otherwise full Euro 6 tailpipe emission requirements (including PN RDE), revised evaporative emissions test procedure;

'Euro 6d-TEMP' emissions standard = RDE NOx testing against temporary conformity factors, otherwise full Euro 6 tailpipe emission requirements (including PN RDE);

'Euro 6d-TEMP-EVAP' emissions standard = RDE NOx testing against temporary conformity factors, otherwise full Euro 6 tailpipe emission requirements (including PN RDE), revised evaporative emissions test procedure;

'Euro 6d' emissions standard = RDE testing against final conformity factors, otherwise full Euro 6 tailpipe emission requirements, revised evaporative emissions test procedure.;

#### (e) Appendix 8b is corrected as follows:

(i) in point 2.1.3., the following text is inserted before the table:

"The manufacturer and the type approval authority shall agree which vehicle test model is representative.

The vehicle parameters test mass, tyre rolling resistance and frontal area of both a vehicle  $H_M$  and  $L_M$  shall be determined in such a way that vehicle  $H_M$  produces the highest cycle energy demand and vehicle  $L_M$  the lowest cycle energy demand from the road load matrix family. The manufacturer and the type approval authority shall agree on the vehicle parameters for vehicle  $H_M$  and  $L_M$ .

The road load of vehicles  $H_M$  and  $L_M$  of the road load matrix family shall be calculated according to paragraph 5.1. of Sub-Annex 4 of Annex XXI.";

- (ii) in point 2.4.3, the words "Repeat §2.4.1. with the representative vehicle data if applicable" are deleted;
- (iii) in point 2.6.1, the last row of the table "ROAD LOAD MATRIX (Annex XXI, Sub Annex 4, §5)" is replaced by the following:

"Final results	Torque method:
	c0r=
	c1r=
	c2r=
	and
	$f0r$ (calculated for vehicle $H_M$ ) =
	f2r (calculated for vehicle $H_M$ ) =
	$f0r$ (calculated for vehicle $L_M$ ) =
	f2r (calculated for vehicle $L_M$ ) =
	Coastdown method:
	f0r (calculated for vehicle $H_M$ ) =
	f2r (calculated for vehicle $H_M$ ) =
	f0r (calculated for vehicle $L_M$ ) =
	f2r (calculated for vehicle $L_M$ ) =".

(f) In the table in Appendix 8c the first 4 rows are replaced by the following:

"

Adjustable wheel alignment parameters	:		
Annex XXI, Sub-Annex 4, § 4.2.1.8.3.			
The coefficients, c0, c1 and c2,	:	c0=	
		c1=	
		c2=	
The coastdown times measured on the chassis dynamometer	:	Reference speed (km/h)	Coastdown time (s)
Annex XXI, Sub-Annex 4, §4.4.4.		130	
		120	
		110	
		100	
		90	
		80	
		70	
		60	
		50	
		40	
		30	
		20	
Additional weight may be placed on or in the vehicle	:	weight (kg)	
to eliminate tyre slippage		on/in the vehicle	

Annex XXI, Sub-Annex 4, §7.1.1.1.1.		
The coastdown times after performing the vehicle coast down procedure according paragraph 4.3.1.3 of Annex XXI, Sub-Annex 4 Annex XXI, Sub-Annex 4, §8.2.4.2.	Reference (km/h)  130  120  110  100  90  80  70  60  50  40  30  20	Coastdown time (s)

ı۱.

- (2) Annex IIIA is corrected as follows:
- (a) Point 3.1 is replaced by the following:
- " 3.1 The following requirements apply to PEMS tests referred to in Article 3(11), second sub-paragraph."
- (b) Appendix 6 is corrected as follows:
  - (i) in point 2 the line corresponding to the symbol " $a_{\text{ref}}$ " is replaced by the following:

" $a_{ref}$  ......Reference acceleration for  $P_{drive}$ ";

(ii) in point 2 the line corresponding to the symbol "TM" is replaced by the following:

"TM..... Test mass of the vehicle";

(iii) in point 2 the line corresponding to the symbol " $v_{ref}$ " is replaced by the following:

" $v_{ref}$  ...... Reference velocity for  $P_{drive}$  ";

(iv) point 3.4.1 shall be replaced by the following:

3.4.1. The power classes and the corresponding time shares of the power classes in normal driving are defined for normalized power values to be representative for any LDV (Table 1-2).

"

Table 1-2

# Normalized standard power frequencies for urban driving and for a weighted average for a total trip consisting of 1/3 urban, 1/3 road, 1/3 motorway mileage

Power	P <sub>c,norm,j</sub> [-]		Urban	Total trip
class No.	From >	to <u>≤</u>	Time share, t <sub>C,j</sub>	
1		-0.1	21.9700%	18.5611%
2	-0.1	0.1	28.7900%	21.8580%
3	0.1	1	44.0000%	43.4582%
4	1	1.9	4.7400%	13.2690%
5	1.9	2.8	0.4500%	2.3767%
6	2.8	3.7	0.0450%	0.4232%
7	3.7	4.6	0.0040%	0.0511%
8	4.6	5.5	0.0004%	0.0024%
9	5.5		0.0003%	0.0003%

The  $P_{c,norm}$  columns in Table 1-2 shall be de-normalised by multiplication with  $P_{drive}$ , where  $P_{drive}$  is the actual wheel power of the tested car in the type approval settings at the chassis dynamometer at  $v_{ref}$  and  $a_{ref}$ .

$$P_{c,j}$$
 [kW] =  $P_{c,norm,j} * P_{drive}$ 

$$P_{drive} = \frac{v_{ref}}{3.6} \times \left( f_0 + f_1 \times v_{ref} + f_2 \times v_{ref}^2 + TM_{WLTP} \times a_{ref} \right) \times 0.001$$

Where:

- *j* is the power class index according to Table 1
- $v_{ref} = 66 \text{ km/h}$
- $a_{ref} = 0.44 \text{ m/s}^2$
- The driving resistance coefficients  $f_0$ ,  $f_1$ ,  $f_2$  are the target WLTP road load values for the individual vehicle to be PEMS tested, as defined in point 2.4. of sub-Annex 4 of Annex XXI
- $TM_{WLTP}$  is the WLTP test mass of the individual vehicle to be PEMS tested, as defined in point 3.2.25 of Annex XXI.

":

#### (v) point 3.4.2. is replaced by the following:


"

## 3.4.2. Correction of the wheel power classes

The maximum wheel power class to be considered is the highest class in Table 1 which includes ( $P_{rated} \times 0.9$ ). The time shares of all excluded classes shall be added to the highest remaining class.

From each  $P_{c,norm,j}$  the corresponding  $P_{c,j}$  shall be calculated to define the upper and lower bounds in kW per wheel power class for the tested vehicle as shown in Figure 1.

 $\label{eq:Figure 1} Figure \ 1$  Schematic picture for converting the normalized standardised power frequency into a vehicle specific power frequency

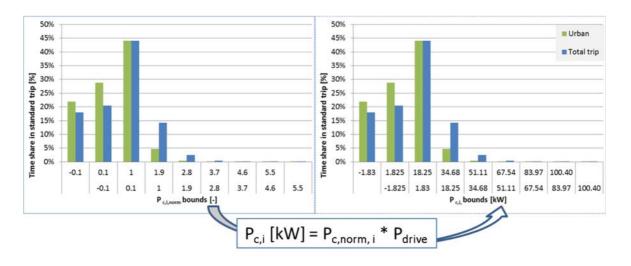

An example for this de-normalisation is given below.

Example for input data:

Parameter	Value
f <sub>0</sub> [N]	86
f <sub>1</sub> [N/(km/h)]	0.8
$f_2 [N/(km/h)^2]$	0.036
TM [kg]	1590

P <sub>rated</sub> [kW]	120 (Example 1)
P <sub>rated</sub> [kW]	75 ( Example 2)

# Corresponding results:

 $P_{drive} = 66[km/h]/3.6*(86+0.8[N/(km/h)]*66[km/h]+0.036[N/(km/h)]*(66[km/h])^2+1590[kg]*0.44[m/s^2])*0.001$ 

 $P_{drive} = 18.25 \text{ kW}$ 

 $\label{eq:Table 2} \label{eq:Table 2}$  De-normalised standard power frequency values from Table 1 (for Example 1)

Power	$P_{c,j}$	[kW]	Urban	Total trip
class No.	From >	to <u>≤</u>	Time sh	nare, t <sub>C,j</sub> [%]
1		-1.825	21.97%	18.5611%
2	-1.825	1.825	28.79%	21.8580%
3	1.825	18.246	44.00%	43.4583%
4	18.246	34.667	4.74%	13.2690%
5	34.667	51.088	0.45%	2.3767%
6	51.088	67.509	0.045%	0.4232%
7	67.509	83.930	0.004%	0.0511%
8	83.930	100.351	0.0004%	0.0024%
9	100.351		0.00025%	0.0003%

<sup>&</sup>lt;sup>(1)</sup> The highest wheel power class to be considered is the one containing 0.9 x Prated. Here 0.9 x 120 = 108.

Table 3

# De-normalised standard power frequency values from Table 1 (for Example 2)

Power P <sub>c,j</sub> [kW]			Urban	Total trip
class No.	From >	to <u>≤</u>	Time share, t <sub>C,j</sub> [%]	
1	All<-1.825	-1.825	21.97%	18.5611%
2	-1.825	1.825	28.79%	21.8580%
3	1.825	18.246	44.00%	43.4583%
4	18.246	34.667	4.74%	13.2690%
5	34.667	51.088	0.45%	2.3767%

6 <sup>(1)</sup>	51.088	All >51.088	0.04965%	0.4770%
7	67.509	83.930	-	-
8	83.930	100.351	-	-
9	100.351	All >100.375	-	-

<sup>&</sup>lt;sup>(1)</sup> The highest class wheel power class to be considered is the one containing  $0.9 \times P_{rated}$ . Here  $0.9 \times 75 = 67.5$ .

(3) In Annex V, point 2.3. is replaced by the following:

"2.3. The road load coefficients to be used shall be those for vehicle low (VL). If VL does not exist or the total load of vehicle (VH) at 80 km/h is higher than the total load of VL at 80 km/h + 5%, then the VH road load shall be used. VL and VH are defined in point 4.2.1.2. of Sub-Annex 4 to Annex XXI. Alternatively the manufacturer may choose to use road loads that have been determined according to the provisions of Appendix 7 of Annex 4a of UN/ECE Regulation No 83 for a vehicle included in the interpolation family."

- (4) In Annex VI point 5.2.8 is replaced by the following:
- "5.2.8 As an exception to points 5.2.1 to 5.2.7 above, the Manufacturers using multilayer or metal tanks may choose to use the following assigned permeability factor (APF) instead of the complete measurement procedure mentioned above:

APF multilayer/metal tank= 120 mg/24h"

- (5) In Annex VII, point 3.10. is replaced by the following:
- "3.10. The road load coefficients to be used shall be those for vehicle low (VL). If VL low does not exist or the total load of vehicle (VH) at 80 km/h is higher than the total load of VL at 80 km/h + 5%, then the VH road load shall be used. VL and VH are defined in point 4.2.1.2. of Sub-Annex 4 to Annex XXI."
  - (6) In Annex VIII, point 3.3. is replaced by the following:
- "3.3. The road load coefficients to be used shall be those for vehicle low (VL). If VL low does not exist or the total load of vehicle (VH) at 80 km/h is higher than the total load of VL at 80 km/h + 5%, then the VH road load shall be used. VL and VH are defined in point 4.2.1.2. of Sub-Annex 4 to Annex XXI. Alternatively the manufacturer may choose to use road loads that have been determined according to the provisions of Appendix 7 of Annex 4a of UN/ECE Regulation No 83 for a vehicle included in the interpolation family."

- (7) In Annex XII, point 5.4. is replaced by the following:
- "5.4. The manufacturer of the base vehicle shall test a vehicle representative of a completed multi-stage vehicle for road load determination. The manufacturer of the base vehicle shall calculate the road load coefficients of vehicle  $H_M$  and  $L_M$  of a road load matrix family as set in paragraph 5 of Sub-Annex 4 to Annex XXI and shall determine the CO2 emission and fuel consumption of both vehicles. The manufacturer of the base vehicle shall make available a calculation tool to establish, on the basis of the parameters of completed vehicles, the final fuel consumption and CO2 values as set in Sub-Annex 7 to Annex XXI."
- (8) Annex XXI is corrected as follows:
- (a) Point 3.2.19 is replaced by the following:
  - "3.2.19.'Target road load' means the road load to be reproduced on the chassis dynamometer.";
- (b) Sub-Annex 4 is amended as follows:
  - (i) in point 5.1.1.1., the line corresponding to the symbol "RR" is replaced by the following:
  - "RR is the tyre rolling resistance class value of the individual vehicle of the road load matrix family, kg/tonne;";
    - (ii) in point 5.1.2.1, the line corresponding to the symbol "RR" is replaced by the following:
  - "RR is the tyre rolling resistance class value of the individual vehicle of the road load matrix family, kg/tonne;";
    - (iii) in point 8.2, in the second paragraph, the last sentence is replaced by the following:
    - "The target running resistance values are the values calculated using the method specified in paragraph 5.1. of this Sub-Annex.";
- (c) In Sub-Annex 6a the following point 3.7.3 is inserted:
  - "3.7.3. In particular, the tailpipe emissions measured at an ATCT test shall not be above the Euro 6 emission limits applicable to the vehicle tested defined in Table 2 of Annex I to Regulation (EC) No 715/2007.".